




LIGHTWEIGHT HAND PUMP

Features

- Lightweight and compact design
- Two speed operation
- Internal pressure relief valve
- Low handle force
- Enamel finish
- 700 bar maximum operating pressure

Range

Oil Volume: 0.7 - 7.5 litres
 Pressure: 25/700 bar

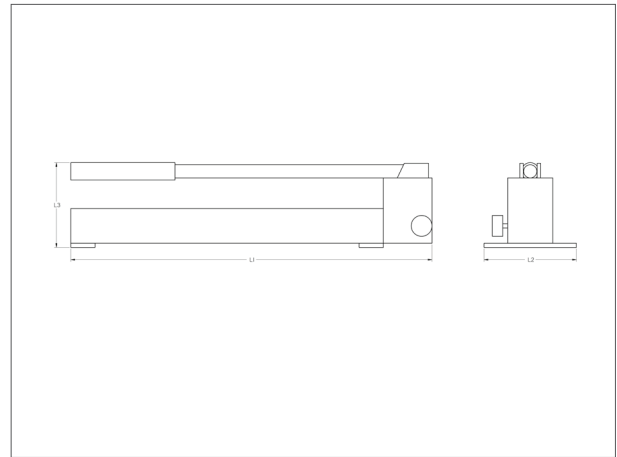

T
N
E
M
P
I
U
Q
E
G
N
I
K
C
A
J
S
H
H

Specification Chart

Part No.	Oil Volume (cm ³)	Pressure Rating (bar)		Output Volume Per Stroke (cm ³)		Handle Force (kN)	L1 (mm)	L2 (mm)	L3 (mm)	Pressure Port Thread	Weight (kg)
		1st Stage	2nd Stage	1st Stage	2nd Stage						
IHS-LHP-0.7	655	25	700	15	2.6	300	325	140	106	3/8" NPT	5.3
IHS-LHP-1.4	1440	25	700	32	2.5	300	325	180	137	3/8" NPT	6.3
IHS-LHP-2.2	2200	25	700	16	2.5	300	325	224	172	3/8" NPT	8
IHS-LHP-3.2	3240	25	700	32	2.5	300	325	245	190.7	3/8" NPT	10
IHS-LHP-5.9	5860	25	700	32	2.5	300	325	275	216	3/8" NPT	14.5
IHS-LHP-7.5	7500	14	700	126	4.8	300	314	350	270	3/8" NPT	27

P: +61 3 9645 1522 | E: mail@mcmillaneng.com.au | W: www.mcmillaneng.com.au