STRAND PUSHER

Standard Features

- High torque capacity
- Low to high speed variable operation
- Tension adjustment
- Remote radio control
- Sturdy construction with two lifting points
- Covered & lockable storage box

Optional Features

- Digital feed counter with programmable lengths

Specifications

Strand:	12.7 (0.5”), 15.2 (0.6”) & 15.7
Insertion Length:	Up to 100m
Speed:	43.5 - 230m/min
Power:	7.5kW
Supply:	415V 3-Phase
Dimensions:	1020mm x 725mm x 1235mm
Weight:	500kg

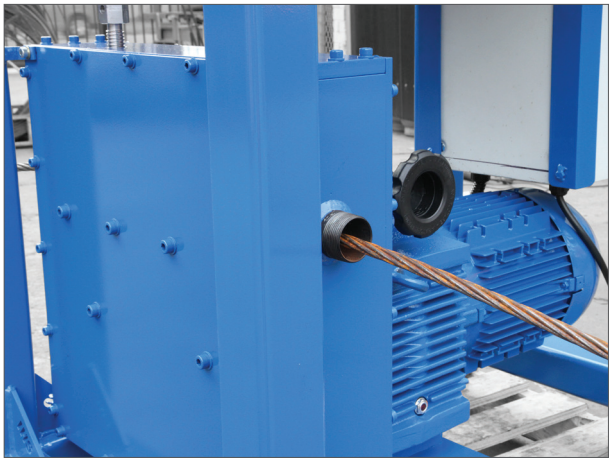

Ordering Information

Part No.	Description
IHS-SP-7.5	7.5kW Strand Pusher

Accessories / Spares

Part No.	Description
IHS-SP-7.5-R	Roller
IHS-SP-7.5-RD	Roller Driver
IHS-SP-7.5-B	Bearing

IHS STRESSING EQUIPMENT

P: +61 3 9645 1522 | E: mail@mcmillaneng.com.au | W: www.mcmillaneng.com.au

mcmillan
ENGINEERING GROUP PTY LTD